



BLAZE

OS&Y Resilient Seated Gate Valve

Model : BT 1405

Description:

The BLAZE OS&Y Resilient Seated Gate Valve is designed for reliable shut-off in potable water, HVAC, mechanical services and industrial applications. Featuring an Outside Screw and Yoke (OS&Y) design, it provides clear visual indication of valve position and easy access for maintenance. The ductile iron body is internally and externally coated with Fusion Bonded Epoxy (FBE) in RAL 5015 blue for excellent corrosion protection, while the fully encapsulated resilient wedge ensures tight sealing and smooth operation. With a full-bore design, PN16 flanged connections to EN 1092-2, and WRAS-approved sizes from 2" to 12", it offers dependable performance and long service life.

Specifications :

Size	2" to 12" (DN50 to DN300) - WRAS Approved 14" to 24" (DN350 to DN600) - Standard Design
Working Pressure	233 psi (16 Bar)
Design Standard	BS 5150
Approvals	WRAS Approved
End Connection	PN16 Flanged (BS EN 1092-2)
Temperature Range	0° C to 80°C (32°F to 176°F)
Coating	Fusion Bonded Epoxy (FBE), RAL 5015 (Blue)
Wedge	Ductile-Iron Wedge, EPDM Encapsulated.



Applications :

- Potable water supply systems
- HVAC chilled/hot water lines
- Fire protection and pump isolation
- Industrial and mechanical service pipelines

Dimensions:

Order Code	DN	L (mm)	H (mm)	a (mm)	d (mm)	c (mm)	n-d1	T (mm)	f (mm)	g (mm)	øD (mm)
BT-1405-050-RF	50	178 ± 2	303	50	165	125	4-ø19	19	3	99	160
BT-1405-065-RF	65	190 ± 2	318	65	185	145	4-ø19	19	3	118	160
BT-1405-080-RF	80	203 ± 2	375	80	200	160	4-ø19	19	3	132	180
BT-1405-100-RF	100	229 ± 2	426	100	220	180	8-ø19	19	3	156	200
BT-1405-125-RF	125	254 ± 3	547	125	250	210	8-ø19	19	3	184	250
BT-1405-150-RF	150	267 ± 3	563	150	285	240	8-ø23	19	3	211	250
BT-1405-200-RF	200	292 ± 3	735	200	340	295	12-ø23	20	3	266	300
BT-1405-250-RF	250	330 ± 3	888	250	405	355	12-ø28	22	3	319	350
BT-1405-300-RF	300	356 ± 3	937	300	460	410	12-ø28	24.5	4	370	400

Note: All dimensions are for informational purposes only. Final details should be verified with the approved technical drawings. Dimensional details for valves above 12" size are available upon request.

BLAZETECH SYSTEMS LTD.



www.blaze-tech.co.uk

Milton Keynes, United Kingdom



contact@blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST

01/02


Ver. A, 01082026, © Blaze 2026



BLAZE

OS&Y Resilient Seated Gate Valve

Model : BT 1405

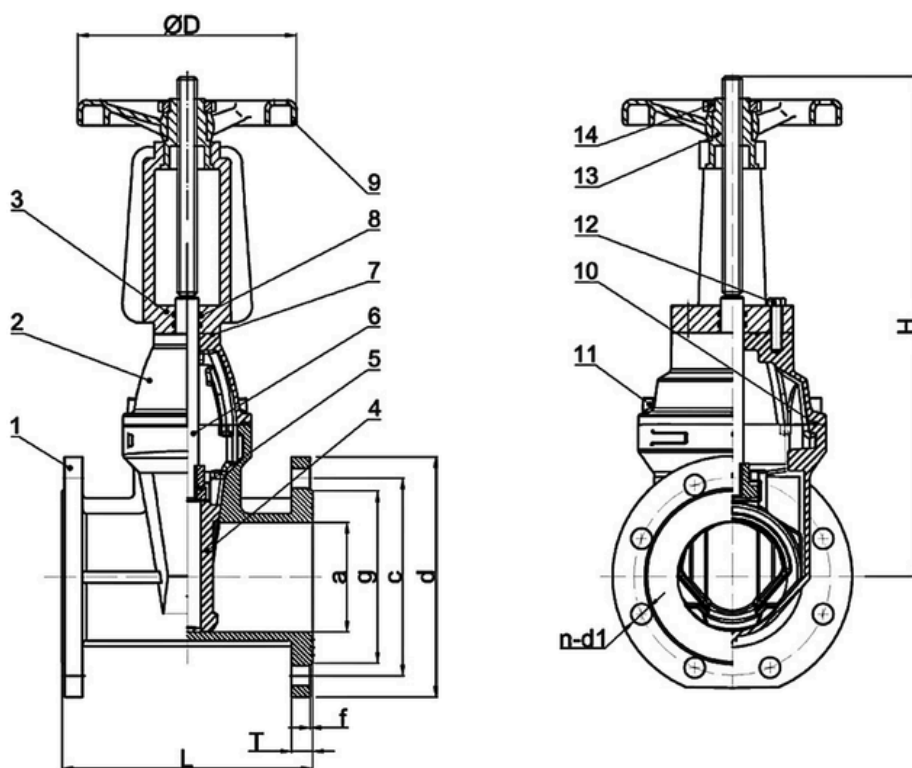

Material Specification :

No.	Part Name	Material	Specification
1	Body	Ductile Iron	EN-GJS-400
2	Bonnet	Ductile Iron	EN-GJS-400
3	Bracket	Ductile Iron	EN-GJS-400
4	Disc	Ductile Iron	GJS-400+WRAS EPDM
5	Stem nut	Brass	Hm58-2-2
6	Stem	Stainless Steel	BS 970x20Cr13
7	seal	Brass/Carbon steel	
8	O-ring	NBR	
9	Handwheel	Ductile Iron	BS EN 1563 EN-GJS-400
10	Seal	WRAS EPDM	ASTM A536 65-45-12
11	Bolt	Carbon steel	
12	Bolt	Carbon steel	
13	Stem nut	Brass	
14	Nut	Carbon steel	

BLAZETECH SYSTEMS LTD.



www.blaze-tech.co.uk

Milton Keynes, United Kingdom



contact@blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST

02/02

Ver. A, 15032026, © Blaze 2026