

**BLAZE**

Split Clamp


Model : BT SC

Description:

The BT SC Split Clamp is designed for supporting non-insulated stationary pipework in horizontal or vertical positions, including applications along roofs and walls. Manufactured from mild steel, BT SC Split Clamp provides a secure and adjustable pipe support solution. It is available in electro-galvanised, hot-dip galvanised and zinc-flake finishes, with sizes from ½" to 3", load capacities up to 570 kg, and a maximum temperature rating of 343°C (650°F).

Specifications :

Size	1/2" - 3" (DN15 - DN80)
Maximum Temperature	343°C (650°F)
Material	Mild Steel * Other Materials on request
Finish	Plain / Electro-Galvanized / Zinc Flake / Hot Dip Galvanized
Approvals	UL Listed

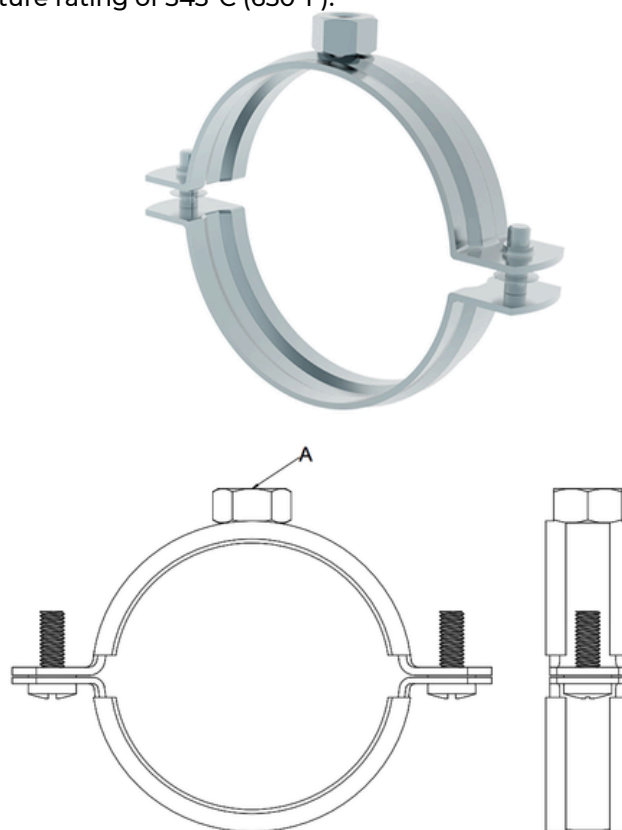

Dimensions :

Order Code	Nominal Pipe Size		Pipe OD	Range	Hanger Rod Size	Side Screw Size	Max Load
	Inch	DN	(mm)	(mm)	A (mm)		Kg
BT-SC-015-EG / -HDG	1/2"	DN15	21.3	20-25	M10	M6	460
BT-SC-020-EG / -HDG	3/4"	DN20	26.7	26-30	M10	M6	460
BT-SC-025-EG / -HDG	1"	DN25	33.4	32-36	M10	M6	460
BT-SC-032-EG / -HDG	1 ¼"	DN32	42	38-43	M10	M6	460
BT-SC-040-EG / -HDG	1 ½"	DN40	48.2	47-51	M10	M6	460
BT-SC-050-EG / -HDG	2"	DN50	60.3	60-64	M10	M6	460
BT-SC-065-EG / -HDG	2 ½"	DN65	73	74-80	M10	M6	570
BT-SC-080-EG / -HDG	3"	DN80	88.9	87-92	M10	M6	570

BLAZETECH SYSTEMS LTD.✉ contact@blaze-tech.co.uk

Milton Keynes, United Kingdom

🌐 www.blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST**01/01**

Ver. A, 01082026, © Blaze 2026