

**BLAZE**

Sprinkler Hanger With Nut


Model : BT SH

Description:

The BT SH Sprinkler Hanger with Nut is designed to provide reliable vertical support for non-insulated sprinkler pipework. Its adjustable sprinkler nut allows the pipe elevation to be easily adjusted after installation. Manufactured from mild steel, the hanger is suitable for fire sprinkler applications and is available in electro-galvanised, hot-dip galvanised, zinc-flake and epoxy-coated finishes. It supports pipe sizes from 3/4" to 8", with load capacities up to 1,300 kg and a maximum temperature rating of 343°C (650°F).

Specifications :

Size	3/4" - 8" (DN20 - DN200)
Maximum Temperature	343°C (650°F)
Material	Mild Steel * Other Materials on request
Finish	Plain / Electro-Galvanized / Zinc Flake / Hot Dip Galvanized
Approvals	UL Listed

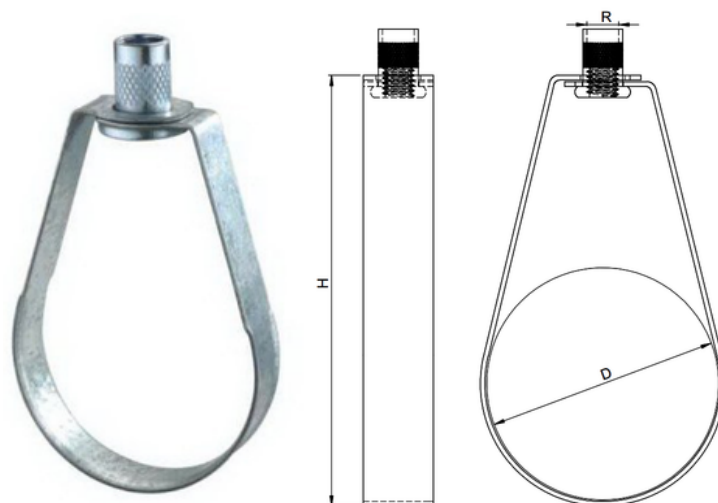

Dimensions :

Order Code	Nominal Pipe Size		Pipe OD	Height	Hanger Rod Size	Max Load
	Inch	DN	(mm)	H (mm)	R (mm)	Kg
BT-SH-020-EG / -HDG	3/4"	DN20	26.7	61	M10	220
BT-SH-025-EG / -HDG	1"	DN25	33.4	70	M10	220
BT-SH-032-EG / -HDG	1 1/4"	DN32	42.1	78	M10	220
BT-SH-040-EG / -HDG	1 1/2"	DN40	48	84	M10	220
BT-SH-050-EG / -HDG	2"	DN50	60.3	102	M10	220
BT-SH-065-EG / -HDG	2 1/2"	DN65	73	118	M10	300
BT-SH-080-EG / -HDG	3"	DN80	88.9	144	M10	300
BT-SH-100-EG / -HDG	4"	DN100	114.3	176	M10	300
BT-SH-150-EG / -HDG	6"	DN150	168.3	262	M12	550
BT-SH-200-EG / -HDG	8"	DN200	219.1	305	M12	1300

BLAZETECH SYSTEMS LTD.✉ contact@blaze-tech.co.uk

Milton Keynes, United Kingdom

🌐 www.blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST**01/01**

Ver. A, 01082026, © Blaze 2026