



BLAZE



U Bolt


Model : BT UB

Description:

The BT UB U-Bolt is designed to secure pipework to structural members while providing reliable vertical support and restricting lateral movement. It allows axial movement where required and helps accommodate pipework installed above structural members. Manufactured from mild steel, the U-bolt features a longer straight thread length and is supplied with standard hex nuts. Available in electro-galvanised, hot-dip galvanised and zinc-flake finishes, it supports pipe sizes from ¾ in. to 6 in., with load capacities up to 900 kg and a maximum temperature rating of 399°C (750°F).

Specifications :

Size	¾" - 6" (DN20 - DN150)
Maximum Temperature	399°C (750°F)
Material	Mild Steel * Other Materials on request
Finish	Plain / Electro-Galvanized / Zinc Flake / Hot Dip Galvanized
Approvals	UL Listed

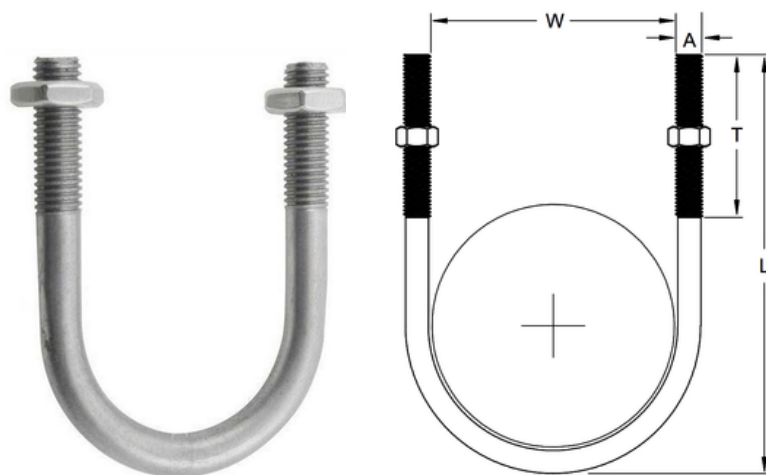

Dimensions :

Order Code	Nominal Pipe Size		Pipe OD	Rod Diameter	Height	Thread Length	Bolt Size	Max Load
	Inch	DN	(mm)	W (mm)	L (mm)	T (mm)	A	(Kg)
BT-UB-020-EG / -HDG	¾"	DN20	26.7	27	77	50	M10	550
BT-UB-025-EG / -HDG	1"	DN25	33.4	34	85	50	M10	550
BT-UB-032-EG / -HDG	1 ¼ "	DN32	42.1	43	93	50	M10	550
BT-UB-040-EG / -HDG	1 ½ "	DN40	48.2	48	100	50	M10	550
BT-UB-050-EG / -HDG	2"	DN50	60.3	60	110	50	M10	550
BT-UB-065-EG / -HDG	2 ½ "	DN65	73.0	76	127	50	M12	900
BT-UB-080-EG / -HDG	3"	DN80	88.9	89	140	50	M12	900
BT-UB-100-EG / -HDG	4"	DN100	114.3	115	165	50	M12	900
BT-UB-125-EG / -HDG	5"	DN125	141.3	140	190	50	M12	900
BT-UB-150-EG / -HDG	6"	DN150	168.3	168	220	50	M12	900

BLAZETECH SYSTEMS LTD.

✉ contact@blaze-tech.co.uk

Milton Keynes, United Kingdom

🌐 www.blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST

01/01

Ver. A, 01082026, © Blaze 2026