

**BLAZE**

U Strap


Model : BT US

Description:

The BT US U-Bolt is designed to secure pipework to structural members while providing reliable vertical support and restricting lateral movement. It allows axial movement where required and helps accommodate pipework installed above structural members. Manufactured from mild steel, the U-bolt features a longer straight thread length and is supplied with standard hex nuts. Available in electro-galvanised, hot-dip galvanised and zinc-flake finishes, it supports pipe sizes from ¾ in. to 6 in., with load capacities up to 900 kg and a maximum temperature rating of 343°C (650°F).

Specifications :

Size	¾" - 12" (DN20 - DN300)
Maximum Temperature	343°C (650°F)
Material	Mild Steel * Other Materials on request
Finish	Plain / Electro-Galvanized / Zinc Flake / Hot Dip Galvanized
Approvals	UL Listed

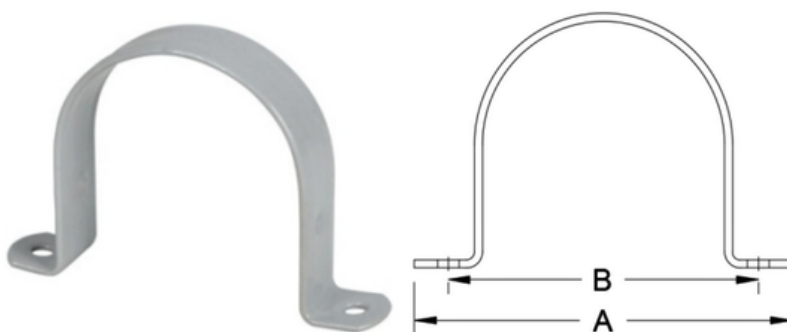

Dimensions :

Order Code	Nominal Pipe Size		Pipe OD	Overall Dimension	Pitch Distance	Bolt Size	Max Load (Kg)
	Inch	DN	(mm)	A (mm)	B (mm)		
BT-US-020-EG / -HDG	¾"	DN20	26.7	82	57	M8	500
BT-US-025-EG / -HDG	1"	DN25	33.4	89	64	M8	500
BT-US-032-EG / -HDG	1 ¼ "	DN32	42.1	96	71	M8	500
BT-US-040-EG / -HDG	1 ½ "	DN40	48	102	77	M8	500
BT-US-050-EG / -HDG	2"	DN50	60.3	114	89	M8	500
BT-US-065-EG / -HDG	2 ½ "	DN65	73	145	113	M8	600
BT-US-080-EG / -HDG	3"	DN80	88.9	160	128	M8	600
BT-US-090-EG / -HDG	3 ½ "	DN90	101.6	170	138	M8	600
BT-US-100-EG / -HDG	4"	DN100	114.3	185	153	M8	600
BT-US-125-EG / -HDG	5"	DN125	141.3	210	178	M10	600
BT-US-150-EG / -HDG	6"	DN150	168.3	237	205	M10	600
BT-US-200-EG / -HDG	8"	DN200	219.1	289	257	M10	800
BT-US-300-EG / -HDG	12"	DN300	323.8	417	376	M18	1250

BLAZETECH SYSTEMS LTD.✉ contact@blaze-tech.co.uk

Milton Keynes, United Kingdom

🌐 www.blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST**01/01**

Ver. A, 01082026, © Blaze 2026