



BLAZE

Bronze Rising Stem Gate Valve


Model : BT 1302

Description:

The BLAZE BT 1302 Bronze Rising Stem Gate Valve provides reliable flow control and shut-off in water, oil, and gas systems. Featuring a rising stem for easy operation and position indication, this valve is built with durable bronze and complies with BS5154. It comes with BSPT ISO 7 threaded connections and is rated for high pressure and temperature use.

Specifications :

Size	1/4" – 2" (DN08 – DN50)
Max. Working Pressure	32 bar (464 psi)
Max. Temperature	< 170°C
Medium	Water, Oil & Gas
Body Material	Bronze
Pipe Thread	BSPT threads (ISO 7)
Design Standard	BS 5154

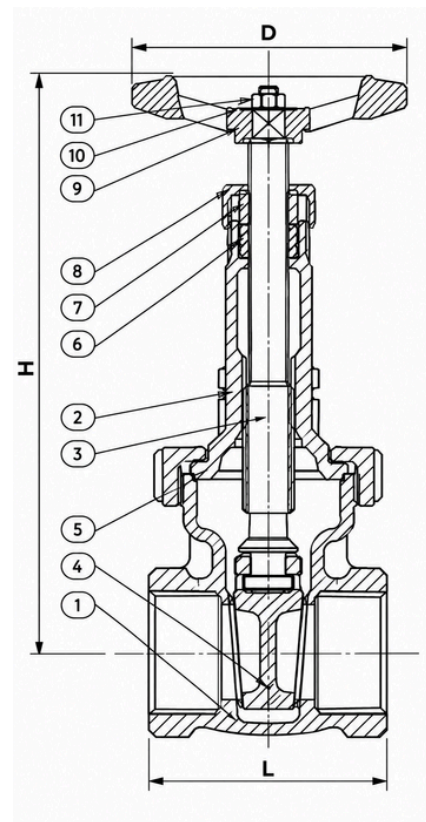

Applications :

- Industrial & Commercial Piping
- Water Distribution Networks
- Oil & Gas Pipelines
- HVAC & Heating Systems
- General Shut-off Service

Dimensions :

DN	INCH	L (mm)	H (mm)	D (mm)
8	1/4"	46	126	45
10	3/8"	46	126	45
15	1/2"	51	129	52
20	3/4"	55	159	65
25	1"	63	189	70
32	1 1/4"	71	219	78
40	1 1/2"	73	246	92
50	2"	83	301	92

Note: All dimensions are provided for informational purposes only. Please cross-check and confirm with the official technical drawings before installation or fabrication.

Material Specifications :

No.	Part Name	Material
1	Body	Bronze CC491K
2	Bonnet-Union	Bronze CC491K
3	Stem	Bronze CC491K
4	Disc	Bronze CC491K
5	Union Ring	Bronze CC491K
6	Packing Ring	Asbestos free
7	Gland	Brass CW614N
8	Packing Nut	Brass CW614N
9	Handwheel	Aluminum
10	Identification Plate	Aluminium
11	Handwheel Nut	Brass CW614N

BLAZETECH SYSTEMS LTD.

contact@blaze-tech.co.uk

Milton Keynes, United Kingdom

www.blaze-tech.co.uk

Disclaimer: Images shown are for illustration purposes only. Actual products may vary in appearance and specification. Specifications are subject to change without notice.

PRECISION YOU CAN TRUST

01/01

Ver. A, 15032026, © Blaze 2026